





**FILTER
TECHNOLOGY**

cleaner fluids mean better business

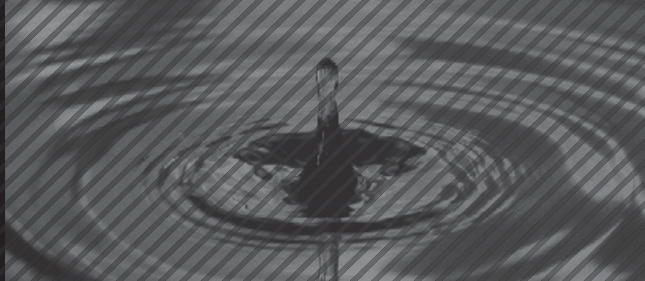

Filtration and Contamination Control Specialists

Oil Filter Element Standard. Part No. FM2000

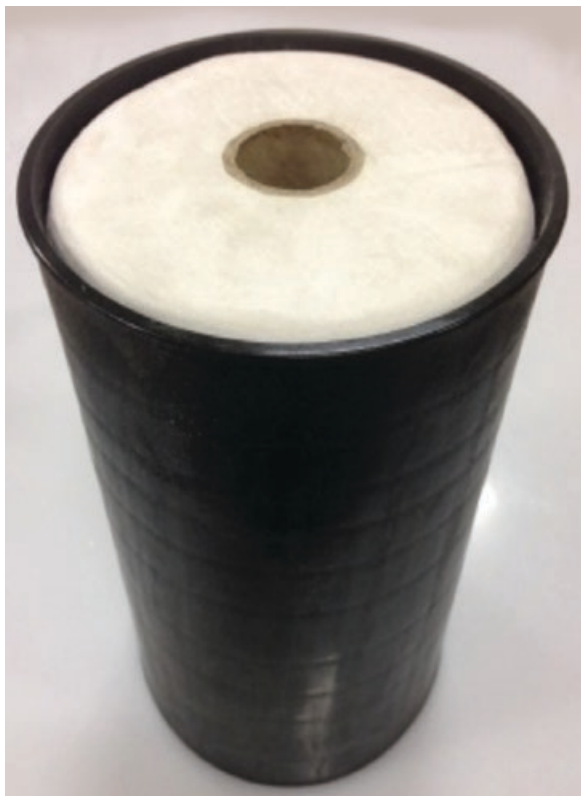

Component	Material
Element	Cellulose
Canister	Zytel
Inner Core	Board Cellulose



Operational Properties and Limits

Melt Point	°C	>260
Heat Deflection Temperature	°C under load @ 1.8 MPa	225
Operational Pressure	Normal bar	Approx. 3.5

Filter Element Efficiency - absolute $\leq 2\mu\text{m}$

Beta Efficiency rating	Particle Size μm Removed	Particle % Removed	Beta Value
Multi Pass Test Normal operation in accordance with ISO 16889:1999	1	99.50%	200
	3	99.70%	400
	4	99.80%	500
	6	99.90%	1000
	10	99.96%	3000
	16	99.99%	10 000
	24	100%	50 000



Filter Technology Australia

Office: 44 Bonville Avenue, Thornton NSW 2322 • Postal: PO Box 101 Beresfield NSW 2322

Tel: +61 2 4966 1833 • Fax: +61 2 4966 1933 • Toll Free Australia: 1800 626 899

Email: info@filtertechnology.com.au • Web: www.filtertechnology.com.au

