




**FILTER
TECHNOLOGY**

cleaner fluids mean better business

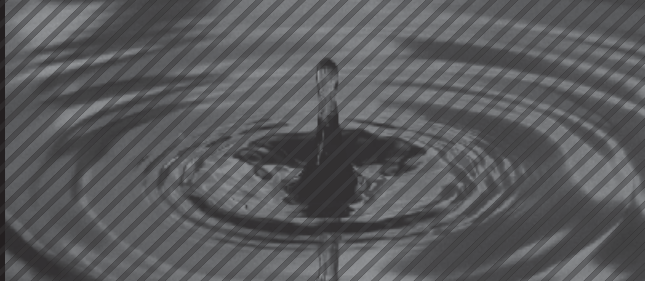

Filtration and Contamination Control Specialists

Industrial Filter Element Standard: Part No FM2100



Component	Material
Element	Cellulose
Canister	Zytel
Inner Core	Board Cellulose



Operational Properties and Limits

Melt Point	°C	>260
Heat Deflection Temperature	°C under load @ 1.8 MPa	225
Operational Pressure	Normal bar	Approx. 3.5

Filter Element Efficiency - absolute $\lt; 2\mu\text{m}$

Beta Efficiency rating	Particle Size μm Removed	Particle % Removed	Beta Value
Multi Pass Test Normal operation in accordance with ISO 16889:1999	1	99.50%	200
	3	99.70%	400
	4	99.80%	500
	6	99.90%	1000
	10	99.96%	3000
	16	99.99%	10 000
	24	100%	50 000



Filter Technology Australia

Office: 44 Bonville Avenue, Thornton NSW 2322 • Postal: PO Box 101 Beresfield NSW 2322

Tel: +61 2 4966 1833 • Fax: +61 2 4966 1933 • Toll Free Australia: 1800 626 899

Email: info@filtertechnology.com.au • Web: www.filtertechnology.com.au

