




**FILTER  
TECHNOLOGY**

cleaner fluids mean better business

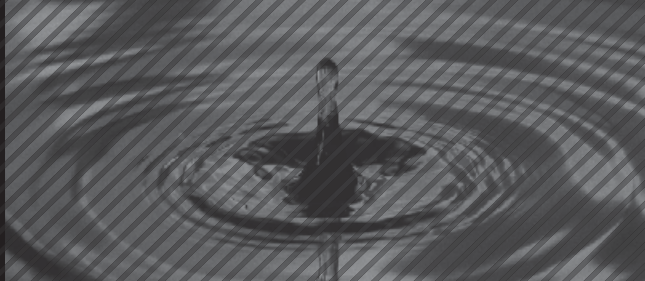

Filtration and Contamination Control Specialists

## FM40246 Bypass Filtration Unit

Designed to suit large gearboxes and hydraulic systems



### Function

The FM40246 is designed to be a self-contained unit, this also gives flexibility to where the unit can be mounted.

The unit draws oil from the plant through the pump to the FTA filters and back to the plant.

### Features

- Self-contained unit.
- Independent isolation.

### Filters

- 2 x FM3204 industrial filter housing.

### Mounting

- Heavy duty powder coated frame.

### Protection

The unit is fitted with:

- 5 bar relief to protect against pressure spikes.
- Pressure gauge to indicate filter housing pressure.
- Live sample point.

### Electrics

- The unit is fitted with a control box.

### Optional

- Element change light.

### FM40246 Dimensions

	Metric	US
Height	1065 mm	42"
Width	680 mm	27"
Depth	300 mm	12"
Weight	66 kg	145 lb
Max Pressure	5 bar	72 psi
Recommended operating pressure	3.1 bar	45 psi



Filter Technology Australia

Office: 44 Bonville Avenue, Thornton NSW 2322 • Postal: PO Box 101 Beresfield NSW 2322

Tel: +61 2 4966 1833 • Fax: +61 2 4966 1933 • Toll Free Australia: 1800 626 899

Email: [info@filtertechnology.com.au](mailto:info@filtertechnology.com.au) • Web: [www.filtertechnology.com.au](http://www.filtertechnology.com.au)

